

## Fore foot step-AD plate 2.7 vas

Variable angle-stable; for screws  $\varnothing$  2.7 mm;  
5 holes; 22 x 16 mm

(Central, non angle-stable hole for compression)



## VaWiKo® T-plate 2.7

Variable angle-stable; for screws  $\varnothing$  2.7 mm;  
2/7 holes; length 73 mm; plate thickness 1.5 mm

(Plate can be shortened at tapered points in the shaft)



**Information:** The system name VaWiKo® is derived from the German designation „Variabel winkelstabile Kombination“, which translates into English as „variable angle-stable combination“. This system combines conventional plating technologies with angle-stable locking in variable angles.

VaWiKo® is a registered trademark of Königsee Implantate GmbH

## Contact details

If you are interested in the  
**FOREFOOT PLATES 2.7 vas**  
please feel free to contact us



### Königsee Implantate GmbH

OT Aschau | Am Sand 4  
07426 Allendorf  
Germany

export@koenigsee-implantate.de  
+ 49 36738 498-560

or your local sales representatives.

[www.koenigsee-implantate.de](http://www.koenigsee-implantate.de)

Copyright © Königsee Implantate GmbH/DaTi | Edition 01 | 2019-09

## FOREFOOT PLATES

Titanium plates range



## Y-plate 2.7 vas

Variable angle-stable; for spacers; for screws  
 $\varnothing$  2.7 mm; 2/2 holes; plate thickness 1.5 mm;  
18 mm x 34 mm



## supplement for Y-plate 2.7 vas

Spacer for foot plate; 8.0 x 3.5 mm



Holding instrument for spacer for foot plates  
 $\varnothing$  12 mm; length 80 mm




Screw basin for foot plate with spacer; 8 cells  
and cap for screw basin



 **Königsee**  
Implantate


## MTP plate for arthrodesis 2.7 vas

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.5 mm

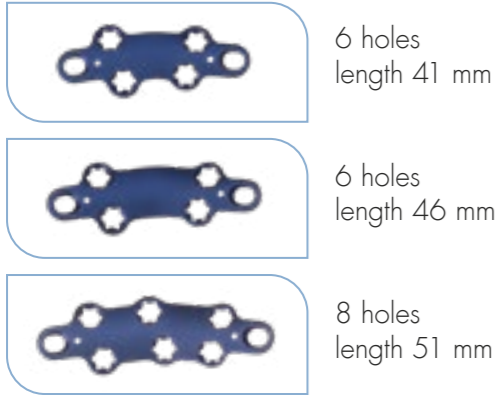


## Straight plate 2.7 vas

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.5 mm; width 8 mm

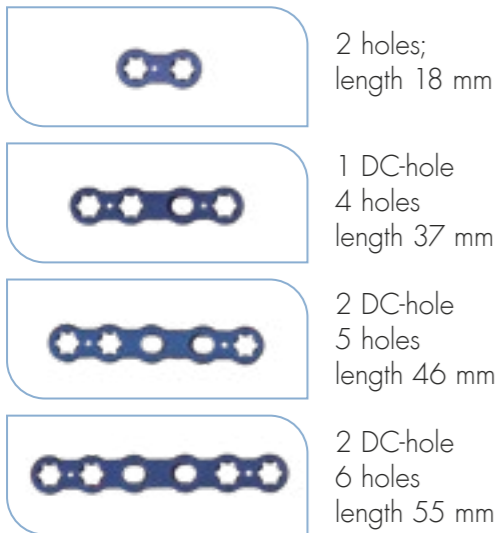

## Double bridge plate 2.7 vas

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.6 mm; 4 holes

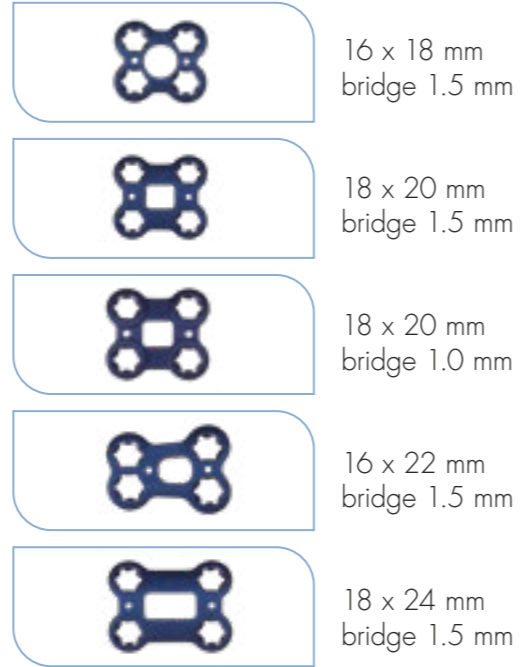

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.6 mm; 16 x 37 mm; 8 holes; bridge 1.5 mm



## Forefoot plates 2.7 vas



● Internal hexagon

★ Six lobe




Standard  
cortical screw  
Ø 2.7 mm  
fully threaded  
self tapping  
flat head

Standard  
cortical screw  
Ø 2.7 mm  
flat head  
fully threaded  
self tapping




Angle-stable  
cortical screw  
Ø 2.7 mm  
fully threaded  
self tapping  
head Ø 5.0 mm

Angle-stable  
cortical screw  
Ø 2.7 mm  
fully threaded  
self tapping  
head Ø 5.0 mm



## L-AD plate 2.7 vas

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.5 mm; width 8 mm; oblique

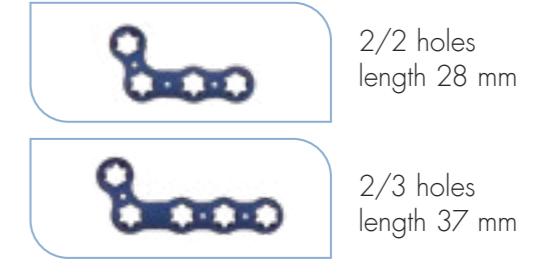

## T-AD plate 2.7 vas

Variable angle-stable; for screws Ø 2.7 mm; plate thickness 1.5 mm; width 8 mm

